

Steel Fibers For Ultra-High Performance Concrete – ASTM A820

	ASTM A820 – TYPE I STEEL FIBERS	
Material	Brass Coated Carbon Steel	
Diameter (Ø)	0.008" (0.2 mm) ± 10%	
Length (l)*	0.5" (13 mm) ± 10%	
Aspect Ratio (l/Ø)	65	
Tensile Strength	400 ksi	Max 440 ksi Min 380 ksi
Buy America Compliant	Yes	
Packaging**	44 lb. (20 kg) bags & 50 lb. (23 kg) bags	
Mill Location	Dickson, TN	

*Other lengths available at customer request.


**Other packaging options possible to meet customer requirements.



For more information or to have a sales representative contact you, visit:

www.sumidenwire.com

Three U.S. manufacturing locations to better serve you:
Dayton, Texas | Dickson, Tennessee | Stockton, California

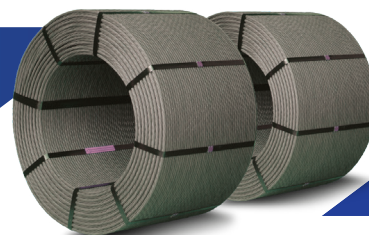

SUMITOMO
ELECTRIC
GROUP